

**E26**<sub>BSR</sub>  
**E29**<sub>BSR</sub>

**E35**<sub>BSR</sub>  
**E39**<sub>BSR</sub>

**E45**<sub>BSR</sub>  
**E50**<sub>BSR</sub>

PRELIMINARY



	E26BSR	E29BSR	E35BSR	E39BSR	E45BSR	E50BSR
<b>OPERATING WEIGHT</b>	2.7 t	2.9 t	3.5 t	3.9 t	4.5 t	5.0 - 5.3 t
<b>DIGGING DEPTH</b>	2.65 m	2.79 m	3.10 m	3.35 m	3.66 m	3.90 m
<b>WIDTH</b>	1.40 m	1.50 m	1.55 m	1.70 m	1.96 m	1.96 m



**BUILT AROUND YOU**

# E26BSR/E29BSR/E35BSR/

## A BIG PERFORMANCE BUILT AROUND YOU

### HEAVY LIFTING, FAST LOADING


- High breakout forces are delivered by the wide cylinder diameter.
- Fast loading cycles result from the high oil flow.
- Higher productivity can be achieved with the available larger buckets.
- Maximum productivity in very narrow spaces is possible with the zero tail swing of the machine's short radius design.



### SPEED, ACCURACY AND SIMULTANEOUS MOVEMENT

Enjoy the high productivity of New Holland Kobelco heavy excavator's Smart Hydraulic System Japanese technology in your mini excavator:

- The Smart Hydraulic System relies on three integrated pumps enabling total and accurate simultaneous movements.
- The third pump powers the blade and swing circuits independently from travel. When digging, the flow from the third pump is redirected to the arm for more power.

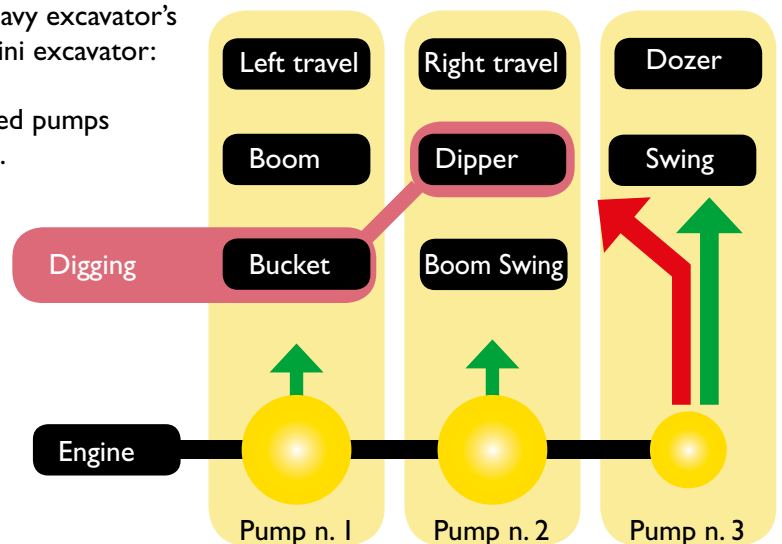

# E39BSR/E45BSR/E50BSR

## COMFORT BUILT AROUND YOU

The spacious cab offers excellent all round visibility and transparent roof

The adjustable seat and armrest, with ergonomic controls, provide a highly comfortable workstation.

The hydraulic distributor is located on the side of the machine to prevent cab overheating; the sliding side windows and removable lower front windows optimize natural ventilation

The optional air conditioning ensures a comfortable temperature inside the cab.



## BUILT IN SAFETY

The Safe Handling Option enhances safety on the jobsite, thanks to:

- Lifting Hook
- Overload device with inside-the-cab warning alarm
- Safety valves on boom and dipper
- Access to service points from ground level provides safe conditions to carry out daily maintenance tasks.



Clim control



Safety valves included in the Safe Handling option

## MAINTENANCE BUILT AROUND YOU

The intuitive layout and smart hood design make it easy and quick to perform all start-up checks.

The exclusive super-fine filter only needs to be changed every 1000 hours and contributes to this machine's excellent environmental performance.

## BUILT IN RELIABILITY

This machine is designed to perform in the toughest conditions.




The protected hose connections can withstand the harshest working conditions.



Five rollers guide the track, enabling the machine to move efficiently on the roughest jobsites and demolition sites. The rollers are positioned so as to reduce vibrations to a minimum.



# SPECIFICATIONS

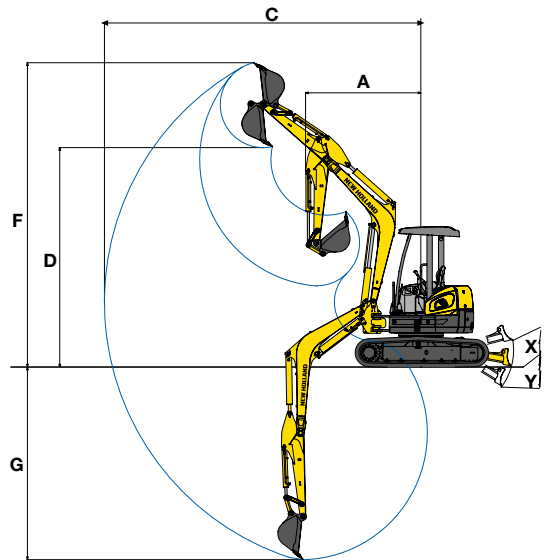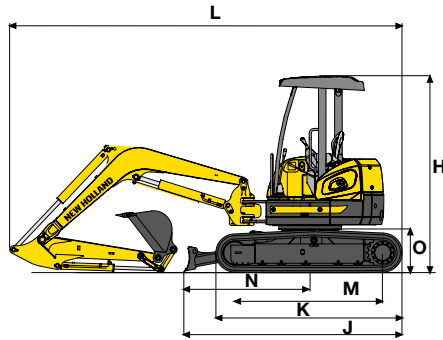

	E26BSR	E29BSR	E35BSR	E39BSR	E45BSR	E50BSR
<b>MODEL CODE</b>						
Cab	NK26MC	NK29MC	NK35MC	NK39MC	NK45MC	NK50MC
Canopy	NK26MR	NK29MR	NK35MR	NK39MR	not available	not available

<b>OPERATING WEIGHT</b> (includes 76Kg operator full fuel tank and one bucket)								
Dipper Type		Standard	Standard	Standard	Standard	Standard	Short	Long
Cab	ton	2.70	2.87	3.50	3.90	4.54	4.95	5.8/5.33*
Canopy	ton	2.38	2.70	3.36	3.76	not available	not available	not available
<b>POWER</b>								
		23 hp	23 hp	30 hp	30 hp	43 hp	43 hp	43 hp

<b>TRANSPORT FEATURE</b> (weight is with full fuel tank, without operator, without bucket)								
Weight (Cab)	ton	2.59	2.73	3.34	3.74	4.34	4.75	5.10
Weight (Canopy)	ton	2.27	2.59	3.20	3.60	-	-	-
<b>B</b> Max width	m	1.40	1.50	1.55	1.70	1.96	1.96	1.96
<b>L</b> Max length	m	3.82	4.13	4.39	4.71	5.00	5.23	5.23
<b>H</b> Max height	m	2.46	2.50	2.57	2.57	2.60	2.60	2.60

<b>DIGGING PERFORMANCES</b>								
<b>G</b> Max digging depth	m	2.65	2.79	3.10	3.35	3.66	3.59	3.90
Bucket Breakout force	kN	20	22	28	36	36	36	36
Dipperstick Breakout force	kN	12	13	15	17	20	24	24

<b>DIMENSIONS</b>								
<b>A</b>	m	2.07/1.90**	2.08/1.88**	2.48/2.00**	2.57/2.07**	2.43	2.56	2.58
<b>C</b>	m	4.52	4.89	5.20	5.50	5.92	5.89	6.19
<b>D</b>	m	2.65/2.95**	3.17/3.38**	2.95/3.50**	3.15/3.76**	3.79	3.68	3.84
<b>F</b>	m	3.85/4.19**	4.47/4.69**	4.30/4.96**	4.49/5.16**	5.34	5.21	5.38
<b>I</b>	mm	250	250	300	300	400	400	400
<b>J</b>	m	2.26	2.41	2.55	2.68	2.78	2.91	2.91
<b>K</b>	m	1.87	1.98	2.00	2.15	2.33	2.48	2.48
<b>M</b>	m	1.49	1.59	1.54	1.70	1.82	1.97	1.97
<b>N</b>	m	1.35	1.44	1.55	1.60	1.63	1.69	1.69
<b>X</b>	cm	43	45	56	54	51	50	50
<b>Y</b>	cm	29	34	41	44	33	38	38

\* with 350 Kg counterweight (optional)

\*\* in canopy version

## AT YOUR OWN DEALERSHIP

The information contained in this brochure is intended to be a general nature only. The NEW HOLLAND KOBELCO CONSTRUCTION MACHINERY S.p.A. company may at any time and from time to time, for technical or other necessary reasons, modify any of the details or specifications of the product described in this brochure. Illustrations do not necessarily show products in standard conditions. The dimensions, weights and capacities shown herein, as well as any conversion data used, are approximate only and are subject to variations within normal manufacturing techniques.

Printed on recycled paper  
Co-C-FSC 000010 CQ Mixed sources



Published by NEW HOLLAND KOBELCO CONSTRUCTION MACHINERY S.p.A.  
Printed in Italy - MediaCross Firenze - Cod. 30625GB - Printed 03/11

