

WE210 WE230

INDUSTRIAL



	WE210	WE230
BASE ENGINE POWER	129 kW - 173 hp	129 kW - 173 hp
OPERATING WEIGHT	22700 - 23400 kg	25100 - 25400 kg



BUILT AROUND YOU

WE210/WE230 IN

STRONG, POWERFUL AND HIGH PERFORMANCE

- NEW HOLLAND Stage IIIA engine with high torque at lower speed
- High productivity with lower pollution
- 3-pumps hydraulic system
- Dedicated pump for full independent swing operation



DUSTRIAL

HIGH STABILITY E VERSATILE

- Outstanding lifting capacities and operating stability
- New proportional controls for stabilisers and rotating circuit for grab/clamshell bucket

SPACIOUS AND COMFORTABLE CAB

- All-around visibility, parallelogram windshield wiper
- Standard air-suspension seat and tilting left console
- New joysticks with ergonomic handle

EASY MAINTENANCE AND SERVICEABILITY

- Ground level access to engine filters and radiators
- Safe service platform to access engine compartment



WE210/WE230 IN

SPECIFICATIONS



ENGINE STAGE IIIA

Net engine power (ISO 14396/ECE R120)	129 kW/173 hp
Rated	2000 rpm
Make and model	NewHolland 667TA/MEE
Type	diesel, 4-stroke direct injection, turbocharged and intercooler
Displacement	6.7 l
Number of cylinders	6
Bore/stroke	104 x 132 mm

Remote engine oil filter for easy replacement
Auto-Idling selector returns engine to minimum rpm when all controls are in neutral position
-25° C outside temperature start as standard equipment
 The engine complies with 97/68/EC standards Stage IIIA



ELECTRICAL SYSTEM

Voltage	24 V
Batteries	2 x 12 V
Battery rating (each)	100 Ah
Alternator	70 A
Starter motor	4 kW



HYDRAULIC SYSTEM

Primary pumps	3 variable displacement, axial piston
Implement / travel pressure	340/345 bar
Power Boost	370 bar
Swing circuit pressure	390 bar
Pilot pressure	45 bar

WE210 Industrial

Total maximum flow	490 l/min (2 x 195 + 110)
Boom cylinders	135 x 985
Arm cylinders	115 x 1130

WE230 Industrial

Total maximum flow	544 l/min (2 x 207 + 130)
Boom cylinders	145 x 985
Arm cylinders	125 x 1130

Control and monitoring system (Pump Control System IV).
 Electrohydraulic servo-control.
 Three-pump hydraulics with two main pumps and separate swing pump.
 Monitoring of engine and pumps by power limit control.
 7 selectable power stages for lifting and loading.



SWING DRIVE

Torque (SAE J1371)	WE210 Industrial 58 kNm
Torque (SAE J1371)	WE230 Industrial 66 kNm

The swing function is operated by a hydraulic closed circuit coupled with a mechanical reducer integrating an automatic static brake. The hydrostatic swing brake is adjustable 3 settings.



TRANSMISSION

Max travel speed	20 km/h
Field travel speed	5 km/h
Min creep speed	2 km/h
Maximum drawbar pull	130 kN

Automatic or manual gear shifting control.
 Travel mode automatically engaged when pressing accelerator pedal
 Optional wider axles for higher stability when working unsupported; availability can be limited by local homologation



CAB AND CONTROLS

Sound absorbing cab in soft design.
 Tinted safety glass all around, push-in front window.
 Sunshade, roof window, transparent rain shield.
 LC display with integrated diagnosis function.
 Incline adjustable steering column.
 Ergonomic design of armrests and foot pedals, armrest is height adjustable.
 Operator's seat individually adjustable in height and inclination.
 Pre-installation for radio and loudspeaker.



BRAKE SYSTEM

Service brakes: oil bath disc type acting on all four wheels.
 Work brake: acts on service brakes and locks front axle oscillation.
 Parking brake: spring type mechanical acting on the transmission.
 Emergency brake: double braking circuit and automatic parking brake actuation with the engine shut down



STEERING

Type.....ORBITROL with safety valve
 Pump.....gear type
 Steering cylinder.....one, double effect



TYRES

Twin tyres	10.00 - 20
	11.00 - 20
	Solid Cushion 10.00 - 20





CAPACITIES

Litres	
Engine oil	16
Cooling system	30
Fuel tank	335
Hydraulic system	330

DUSTRIAL



DIMENSIONS (mm)

Equipped with twin tyres 10.00-20

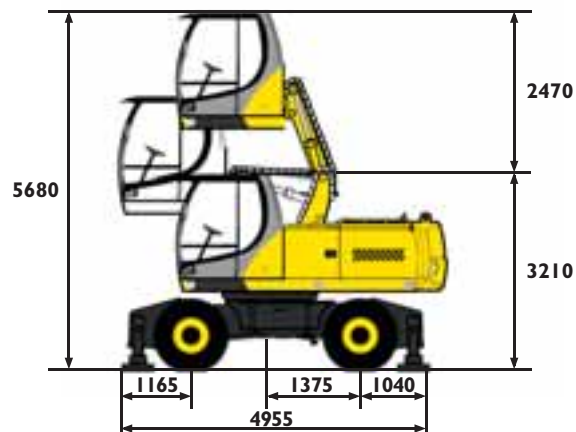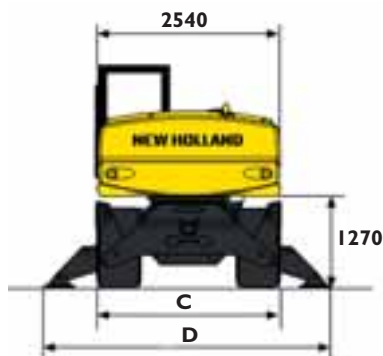

		WE210 IND. STD Gauge	WE210 IND. WIDE Gauge	WE230 IND.
C	mm	2520	2730	2730
D	mm	4145	4355	4355

ARM		3800	5200
A	mm	2185	10110
B	mm	3200	10035

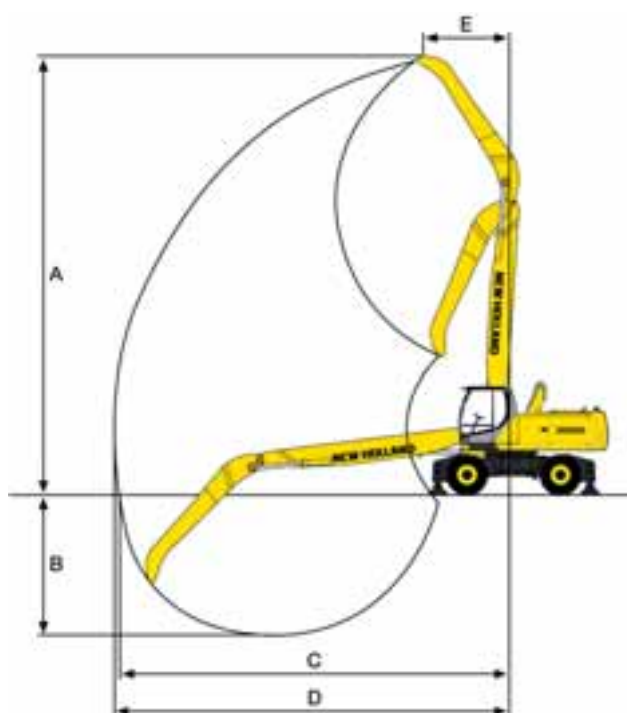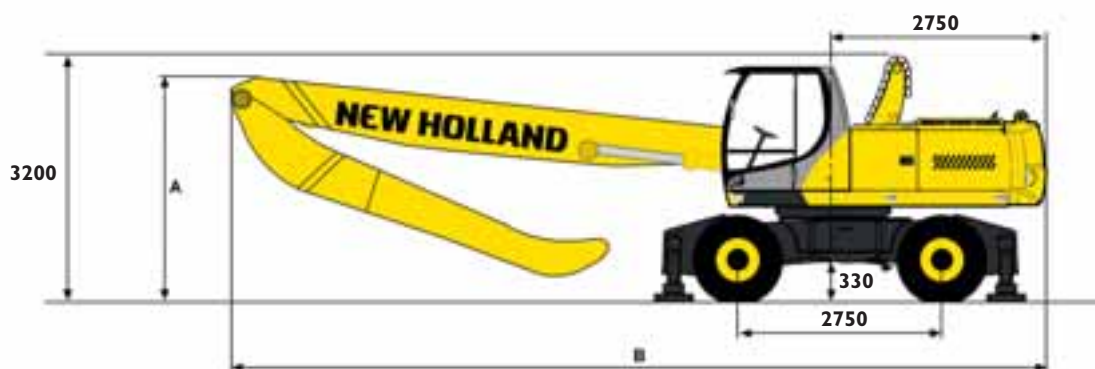

OPERATING WEIGHTS

	UNDERCARRIAGE mm	ARM mm	FRONT AND REAR STABILIZERS kg
WE210	2520	3800	22700
		5200	23000
	2730	3800	23100
		5200	23400
WE230	2730	3800	25100
		5200	25400

WORKING RANGE

DIPPERSTICK	3800	5200
A	11780	12950
B	2910	4310
C	10370	11680
D	10530	11830
E	2060	2830

WE210/WE230 IN

LIFTING CAPACITY

Values are expressed in tonnes

WE210 INDUSTRIAL STANDARD GAUGE

3800 mm DIPPERSTICK

FRONT & REAR STABILISERS UP

HEIGHT	RADIUS OF LOAD												
	4.5 m		6.0 m		7.5 m		9.0 m		10.5 m		AT MAX REACH		REACH m
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	
+9.0 m	9.2	6.2	5.7	3.9	3.9	2.6					3.9	2.6	7.5
+7.5 m	9.1	6.2	5.7	3.9	4.0	2.7					3.0	2.0	8.8
+6.0 m	8.8	5.9	5.5	3.7	3.9	2.6	2.9	1.9			2.5	1.7	9.6
+4.5 m	8.1	5.3	5.2	3.5	3.7	2.5	2.8	1.8			2.3	1.5	10.2
+3.0 m	7.3	4.6	4.9	3.1	3.5	2.3	2.7	1.7			2.1	1.4	10.5
+1.5 m	6.7	4.1	4.6	2.9	3.4	2.1	2.6	1.6	2.1	1.3	2.1	1.3	10.5
0 m	6.5	3.9	4.4	2.7	3.3	2.0	2.6	1.6			2.1	1.3	10.4
-1.5 m	6.2*	3.9	4.3	2.6	3.2	2.0	2.5	1.6			2.2	1.4	10.0
-3.0 m													

FRONT & REAR STABILISERS DOWN

HEIGHT	RADIUS OF LOAD												
	4.5 m		6.0 m		7.5 m		9.0 m		10.5 m		AT MAX REACH		REACH m
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	
+9.0 m	9.8*	9.8*	8.0*	8.0*	4.8*	4.8*					4.6*	4.6	7.5
+7.5 m	10.1*	10.1*	8.0*	8.0*	6.7*	6.0					4.4*	4.4	8.8
+6.0 m	10.6*	10.6*	8.2*	8.2*	6.7*	5.9	5.6	4.4			4.3*	3.9	9.6
+4.5 m	11.5*	11.5*	8.6*	8.2	6.8*	5.8	5.5	4.3			4.3*	3.6	10.2
+3.0 m	12.1*	12.1*	8.8*	7.8	6.8*	5.6	5.4	4.2			4.2*	3.4	10.5
+1.5 m	8.3*	8.3*	8.4*	7.5	6.5*	5.4	5.1*	4.1	3.7*	3.3	3.7*	3.3	10.5
0 m	7.1*	7.1*	7.4*	7.3	5.8*	5.2	4.5*	4.1			3.1*	3.1	10.4
-1.5 m	6.2*	6.2*	5.8*	5.8*	4.7*	4.7*	3.4*	3.4*			2.4*	2.4	10.0
-3.0 m													

5200 mm DIPPERSTICK

FRONT & REAR STABILISERS UP

HEIGHT	RADIUS OF LOAD												
	4.5 m		6.0 m		7.5 m		9.0 m		10.5 m		AT MAX REACH		REACH m
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	
+9.0 m			6.1	4.2	4.2	2.9	3.0	2.0			2.9	1.9	9.3
+7.5 m			6.0	4.2	4.2	2.9	3.0	2.0			2.4	1.5	10.3
+6.0 m	9.2*	6.4	5.8	4.0	4.1	2.8	3.0	2.0	2.3	1.5	2.1	1.3	11.0
+4.5 m	8.8	5.9	5.5	3.7	3.9	2.6	2.9	1.9	2.2	1.4	1.9	1.2	11.5
+3.0 m	8.0	5.1	5.1	3.4	3.6	2.4	2.8	1.8	2.1	1.3	1.8	1.1	11.8
+1.5 m	7.1	4.4	4.7	3.0	3.4	2.2	2.6	1.6	2.1	1.3	1.7	1.0	11.8
0 m	6.6	3.9	4.4	2.7	3.2	2.0	2.5	1.5	2.0	1.2	1.7	1.0	11.7
-1.5 m	6.3	3.7	4.2	2.5	3.1	1.9	2.4	1.5	2.0	1.2	1.8	1.1	11.3
-3.0 m	6.3	3.7	4.2	2.5	3.1	1.8	2.4	1.4	2.0	1.2			

FRONT & REAR STABILISERS DOWN

HEIGHT	RADIUS OF LOAD												
	4.5 m		6.0 m		7.5 m		9.0 m		10.5 m		AT MAX REACH		REACH m
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	
+9.0 m			7.0*	7.0*	5.9*	5.9*	3.8*	3.8*			3.2*	3.2	9.3
+7.5 m			7.2*	7.2*	6.2*	6.2*	5.4*	4.6			3.0*	3.0	10.3
+6.0 m	9.2*	9.2*	7.5*	7.5*	6.3*	6.1	5.4*	4.5	4.3*	3.5	3.0*	3.0	11.0
+4.5 m	10.2*	10.2*	7.9*	7.9*	6.5*	5.9	5.4*	4.4	4.4	3.5	3.0*	3.0	11.5
+3.0 m	11.4*	11.4*	8.4*	8.1	6.6*	5.7	5.4	4.3	4.3	3.4	3.1*	2.8	11.8
+1.5 m	11.9*	11.9*	8.6*	7.7	6.6*	5.4	5.3	4.1	4.2	3.3	3.2*	2.8	11.8
0 m	9.7*	9.7*	8.2*	7.3	6.3*	5.2	5.0*	4.0	3.9*	3.2	2.9*	2.8	11.7
-1.5 m	8.1*	8.1*	7.1*	7.1	5.6*	5.1	4.3*	3.9	3.2*	3.2	2.4*	2.4	11.3
-3.0 m	6.5*	6.5*	5.5*	5.5*	4.4*	4.4*	3.3*	3.3*	2.0*	2.0*			

WE210 INDUSTRIAL WIDE GAUGE

3800 mm DIPPERSTICK

FRONT & REAR STABILISERS UP

HEIGHT	RADIUS OF LOAD												
	4.5 m		6.0 m		7.5 m		9.0 m		10.5 m		AT MAX REACH		REACH m
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	
+9.0 m	9.3	7.1	5.8	4.5	4.0	3.0					3.9	3.0	7.5
+7.5 m	9.2	7.0	5.8	4.4	4.0	3.1					3.0	2.3	8.8
+6.0 m	8.9	6.7	5.6	4.3	3.9	3.0	2.9	2.2			2.6	1.9	9.6
+4.5 m	8.3	6.1	5.3	4.0	3.8	2.8	2.8	2.1			2.3	1.7	10.2
+3.0 m	7.4	5.4	4.9	3.7	3.6	2.7	2.8	2.0			2.2	1.6	10.5
+1.5 m	6.9	4.9	4.6	3.4	3.4	2.5	2.7	2.0	2.1	1.6	2.1	1.6	10.5
0 m	6.7	4.7	4.5	3.2	3.3	2.4	2.6	1.9			2.2	1.6	10.4
-1.5 m	6.2*	4.7	4.4	3.2	3.3	2.4	2.6	1.9			2.3	1.7	10.0
-3.0 m													

FRONT & REAR STABILISERS DOWN

HEIGHT	RADIUS OF LOAD												
	4.5 m		6.0 m		7.5 m		9.0 m		10.5 m		AT MAX REACH		REACH m
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	
+9.0 m	9.8*	9.8*	8.0*	8.0*	4.8*	4.8*					4.6*	4.6	7.5
+7.5 m	10.1*	10.1*	8.0*	8.0*	6.7*	6.5					4.4*	4.4	8.8
+6.0 m	10.6*	10.6*	8.2*	8.2*	6.7*	6.4	5.6*	4.8			4.3*	4.3	9.6
+4.5 m	11.5*	11.5*	8.6*	8.6*	6.8*	6.3	5.6	4.7			4.3*	3.9	10.2
+3.0 m	12.1*	12.1*	8.8*	8.6	6.8*	6.1	5.4	4.6			4.2*	3.7	10.5
+1.5 m	8.3*	8.3*	8.4*	8.2	6.5*	5.9	5.1*	4.5	3.7*	3.6	3.7*	3.6	10.5
0 m	7.1*	7.1*	7.4*	7.4*	5.8*	5.8	4.5*	4.5			3.1*	3.1	10.4
-1.5 m	6.2*	6.2*	5.8*	5.8*	4.7*	4.7*	3.4*	3.4*			2.4*	2.4	10.0
-3.0 m													

5200 mm DIPPERSTICK

FRONT & REAR STABILISERS UP

HEIGHT	RADIUS OF LOAD												
	4.5 m		6.0 m		7.5 m		9.0 m		10.5 m		AT MAX REACH		REACH m
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	
+9.0 m			6.2	4.8	4.2	3.3	3.1	2.3			2.9	2.2	9.3
+7.5 m			6.1	4.7	4.2	3.3	3.1	2.4			2.4	1.8	10.3
+6.0 m	9.2*	7.3	5.9	4.6	4.1	3.2	3.0	2.3	2.3	1.7	2.1	1.5	11.0
+4.5 m	8.9	6.7	5.6	4.3	3.9	3.0	2.9	2.2	2.3	1.7	1.9	1.4	11.5
+3.0 m	8.1	6.0	5.2	3.9	3.7	2.8	2.8	2.1	2.2	1.6	1.8	1.3	11.8
+1.5 m	7.2	5.2	4.8	3.5	3.5	2.6	2.7	2.0	2.1	1.5	1.8	1.3	11.8
0 m	6.7	4.7	4.5	3.2	3.3	2.4	2.6	1.8	2.0	1.5	1.8	1.3	11.7
-1.5 m	6.4	4.5	4.3	3.0	3.2	2.3	2.5	1.8	2.0	1.4	1.8	1.3	11.3
-3.0 m	6.4	4.4	4.2	3.0	3.1	2.2	2.5	1.7	2.0	1.4			

FRONT & REAR STABILISERS DOWN

HEIGHT	RADIUS OF LOAD												
	4.5 m		6.0 m		7.5 m		9.0 m		10.5 m		AT MAX REACH		REACH m
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	
+9.0 m			7.0*	7.0*	5.9*	5.9*	3.8*	3.8*			3.2*	3.2*	9.3
+7.5 m			7.2*	7.2*	6.2*	6.2*	5.4*	5.0			3.0*	3.0*	10.3
+6.0 m	9.2*	9.2*	7.5*	7.5*	6.3*	6.3*	5.4*	4.9	4.3*	3.8	3.0*	3.0*	11.0
+4.5 m	10.2*	10.2*	7.9*	7.9*	6.5*	6.5	5.4*	4.8	4.4	3.8	3.0*	3.0*	11.5
+3.0 m	11.4*	11.4*	8.4*	8.4*	6.6*	6.2	5.4*	4.7	4.4	3.7	3.1*	3.1	11.8
+1.5 m	11.9*	11.9*	8.6*	8.4	6.6*	6.0	5.3*	4.5	4.3	3.6	3.2*	3.0	11.8
0 m	9.7*	9.7*	8.2*	8.0	6.3*	5.8	5.0*	4.4	3.9*	3.5	2.9*	2.9*	11.7
-1.5 m	8.1*	8.1*	7.1*	7.1*	5.6*	5.6	4.3*	4.3	3.2*	3.2*	2.4*	2.4*	11.3
-3.0 m	6.5*	6.5*	5.5*	5.5*	4.4*	4.4*	3.3*	3.3*	2.0*	2.0*			

INDUSTRIAL

LIFTING CAPACITY

Values are expressed in tonnes

WE230 INDUSTRIAL

3800 mm DIPPERSTICK

FRONT & REAR STABILISERS UP

HEIGHT	RADIUS OF LOAD												
	4.5 m		6.0 m		7.5 m		9.0 m		10.5 m		AT MAX REACH		
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	
+9.0 m	11.0	8.5	6.9	5.4	4.7	3.7					4.7	3.7	7.5
+7.5 m	10.9	8.4	6.8	5.3	4.8	3.7					3.7	2.8	8.8
+6.0 m	10.5	8.0	6.6	5.2	4.7	3.6	3.5	2.7			3.1	2.4	9.6
+4.5 m	9.8	7.4	6.3	4.9	4.5	3.5	3.4	2.6			2.8	2.1	10.2
+3.0 m	8.9	6.6	5.9	4.5	4.3	3.3	3.3	2.5			2.6	2.0	10.5
+1.5 m	8.3	6.0	5.6	4.2	4.1	3.1	3.2	2.4	2.6	1.9	2.6	1.9	10.5
0 m	8.0	5.8	5.4	4.0	4.0	3.0	3.1	2.4			2.6	2.0	10.4
-1.5 m	7.3*	5.8	5.3	3.9	3.9	2.9	3.1	2.3			2.7	2.1	10.0
-3.0 m													

FRONT & REAR STABILISERS DOWN

HEIGHT	RADIUS OF LOAD												
	4.5 m		6.0 m		7.5 m		9.0 m		10.5 m		AT MAX REACH		
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	
+9.0 m	11.5*	11.5*	9.3*	9.3*	5.6*	5.6*					5.5*	5.5*	7.5
+7.5 m	11.6*	11.6*	9.3*	9.3*	7.7*	7.6					5.2*	5.2*	8.8
+6.0 m	12.3*	12.3*	9.6*	9.6*	7.8*	7.5	6.5	5.6			5.1*	5.0	9.6
+4.5 m	13.4*	13.4*	10.0*	10.0*	7.9*	7.3	6.5	5.5			5.1*	4.6	10.2
+3.0 m	14.1*	14.1*	10.0*	10.0*	7.9*	7.1	6.3	5.4			4.9*	4.3	10.5
+1.5 m	10.2*	10.2*	9.8*	9.6	7.6*	6.9	5.0*	5.3	4.4*	4.2	4.3*	4.2	10.5
0 m	8.8*	8.8*	8.6*	8.6*	6.8*	6.7	5.2*	5.2			3.7*	3.7*	10.4
-1.5 m	7.3*	7.3*	6.7*	6.7*	5.4*	5.0*	4.0*	4.0*			2.8*	2.8*	10.0
-3.0 m													

5200 mm DIPPERSTICK

FRONT & REAR STABILISERS UP

HEIGHT	RADIUS OF LOAD												
	4.5 m		6.0 m		7.5 m		9.0 m		10.5 m		AT MAX REACH		
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	
+9.0 m			7.3	5.8	5.1	4.0	3.7	2.9			3.5	2.7	9.3
+7.5 m			7.2	5.7	5.0	4.0	3.7	2.9			2.9	2.2	10.3
+6.0 m	10.7*	8.7	7.0	5.5	4.9	3.9	3.6	2.8	2.8	2.1	2.5	1.9	11.0
+4.5 m	10.6	8.1	6.7	5.2	4.7	3.7	3.5	2.7	2.7	2.1	2.3	1.8	11.5
+3.0 m	9.7	7.3	6.2	4.8	4.5	3.4	3.4	2.6	2.7	2.0	2.2	1.6	11.8
+1.5 m	8.7	6.4	5.8	4.3	4.2	3.2	3.2	2.4	2.6	1.9	2.2	1.6	11.8
0 m	8.1	5.8	5.4	4.0	4.0	3.0	3.1	2.3	2.5	1.9	2.2	1.6	11.7
-1.5 m	7.8	5.6	5.2	3.8	3.9	2.9	3.0	2.2	2.5	1.8	2.2	1.7	11.3
-3.0 m	7.7*	5.6	5.2	3.8	3.8	2.8	3.0	2.2	2.5	1.8			

FRONT & REAR STABILISERS DOWN

HEIGHT	RADIUS OF LOAD												
	4.5 m		6.0 m		7.5 m		9.0 m		10.5 m		AT MAX REACH		
	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	FRONT	SIDE	
+9.0 m			8.3*	8.3*	7.0*	7.0*	4.5*	4.5*			3.8*	3.8	9.3
+7.5 m			8.4*	8.4*	7.2*	7.2*	6.3*	5.8			3.6*	3.6	10.3
+6.0 m	10.7*	10.7*	8.7*	8.7*	7.3*	7.3*	6.3*	5.8	5.1*	4.5	3.5*	3.5	11.0
+4.5 m	11.9*	11.9*	9.2*	9.2*	7.6*	7.6	6.4*	5.6	5.2	4.4	3.6*	3.6	11.5
+3.0 m	13.3*	13.3*	9.8*	9.8*	7.8*	7.3	6.4*	5.5	5.1	4.3	3.7*	3.6	11.8
+1.5 m	13.9*	13.9*	10.0*	9.9	7.8*	7.0	6.2	5.3	5.0	4.2	3.9*	3.6	11.8
0 m	11.9*	11.9*	9.6*	9.4	7.4*	6.8	5.9*	5.2	4.6*	4.2	3.4*	3.4	11.7
-1.5 m	9.9*	9.9*	8.4*	8.4*	6.6*	6.6	5.1*	5.1	3.8*	3.8*	2.9*	2.9	11.3
-3.0 m	7.7*	7.7*	6.5*	6.5*	5.2*	5.2*	3.9*	3.9*	2.5*	2.5*			

Lift capacity ratings are based on ISO 10567. The indicated load is no more than 87% of hydraulic system capacity or 75% of static tipping load. Values marked with an asterisk are limited by the hydraulic system.

ATTACHMENTS


ORANGE PEEL GRABS

The P22V and P30V orange peel grabs are ideal for handling of bulky scrap in every application thanks to the choice of tine profiles: fully closing F, half closing H, wide style pointed V, pointed T.

Reliability is maximized thanks to: the continuous rotator with standard overload protection, the hydraulic cylinders with replaceable piston rod protection and cushioned end stroke system, the hydraulic hoses protected in the centre section.

The long life of tines is ensured by the high quality steel (400HB) and tips (500HB), which are replaceable.

	TINES	CLOSED WIDTH mm	OPEN WIDTH mm	VOLUME liters	WEIGHT kg
P22V-450-4	4 -T	1370	1910	450	810
P22V-450-5	5 -F,H,V,T	1370	1910	450	950-1145
P30V-600-4	4 -F,H,V,T	1520	2130	600	1050-1290
P30V-600-5	5 -F,H,V,T	1520	2130	600	1260-1460



CLAMSHELL BUCKET FOR LOOSE MATERIAL

The C40H-Small is ideal for loading and unloading operation s of loose and light materials.

With a generous opening of 2320 mm, the flat closing design of shell gives maximum volume to provide high productivity and guarantee the protection of the ground surface, such as from boat or train carriages.

The two strong hydraulic cylinders provide a high closing force of 63 kN, and are well protected as the hydraulic connections.

WIDTH mm	VOLUME liters	WEIGHT kg
1000	1000	950
1250	1250	1220
1500	1500	1300
1750	1750	1480
2000	2000	1650



PARTS AND SERVICE

The New Holland dealer network is, in itself, the best guarantee of continued productivity for the machines it delivers to its customers. New Holland service technicians are fully equipped to resolve all maintenance and repair issues, with each and every service point providing the high standards they are obliged to observe under New Holland's stringent quality guidelines.

The New Holland global parts network ensures fast, reliable, replacement parts for less downtime, increased productivity and, of course, profitable operation for its customers.



AT YOUR OWN DEALERSHIP

The information contained in this brochure is intended to be of general nature only. The NEW HOLLAND KOBELCO CONSTRUCTION MACHINERY S.p.A. company may at any time and from time to time, for technical or other necessary reasons, modify any of the details or specifications of the product described in this brochure. Illustrations do not necessarily show products in standard conditions. The dimensions, weights and capacities shown herein, as well as any conversion data used, are approximate only and are subject to variations within normal manufacturing techniques.

Published by NEW HOLLAND KOBELCO CONSTRUCTION MACHINERY S.p.A.
Printed in Italy - MediaCross Firenze - Cod **XXXXXGB** - Printed 05/11

Printed on recycled paper
CoC-FSC 000010 CQ Mixed sources



ELEMENTAL
CHLORINE
FREE
GUARANTEED



BUILT AROUND YOU

WWW.NEWHOLLAND.COM